

SKU: GV4652

Valves[™]
ONLINE

- 🇬🇧 VOLT Cast Iron Gate Valve Flanged PN16
- 🇩🇪 VOLT Roheisen- Absperrschieber mit Flansch PN16
- 🇪🇸 VOLT Cast Iron Gate Válvula con bridas PN16
- 🇫🇷 VOLT Cast Iron Gate Valve bride PN16

- 11/2" - 12" Cast Iron Gate Valve Brass Seat – PN16
- 11/2" - 12" Cast Iron Gate Valve Messing Seat – PN16
- 11/2" - 12" Reparto de la válvula Puerta de Hierro Latón Asiento – PN16
- 11/2" - 12" Cast Brass Iron Gate Valve Seat – PN16

Cast Iron Gate Valve PN16 Brass Seat



Description:

A Flanged PN16, Cast Iron Gate Valve, with Inside Screw Non Rising Stem
GG25 Body, Cast Brass Seats, Brass Stem,
Rated PN10,
Temperature -10°C to 120°C.



Description

Flanged PN16, GG25 Body, Cast Brass Seat,
Brass Stem, inside Screw and Non Rising Stem.
Pressure rating of PN10
Temperature up to 120° C



Beschreibung

Mit Flansch PN16, GG25 Körper, Messingguss
Seat, Messing Stängel, Innenschraube und
nicht steigender Spindel. Druckstufe PN10
Temperatur bis zu 120 ° C



Descripción

Con bridas PN16 , GG25 Cuerpo, asiento de latón
fundido , Tallo de latón , en el interior del tornillo
y no Rising Tallo . Resistencia a la presión de
PN10
Temperatura hasta 120 ° C



Description

Brides PN16 , GG25 corps , Cast Siège en laiton ,
Laiton Tige, à l'intérieur de vis et non tige
montante . Pression nominale PN10
Température jusqu'à 120 ° C

Paint Finish



These valves are supplied externally with a Phenolic-oil resin called SITIPAINT for transport and storage use. We recommend the valve be painted for site installation. The valves can be easily re painted with synthetic enamels top coat and also with Bicomponent industrial epoxy coating. Technical details can be obtained on request.

-  VOLT Cast Iron Gate Valve Flanged PN16
-  VOLT Roheisen- Absperrschieber mit Flansch PN16
-  VOLT Cast Iron Gate Válvula con bridas PN16
-  VOLT Cast Iron Gate Valve bride PN16

Valves[™]

ONLINE

PN16 Cast Iron Gate Valve

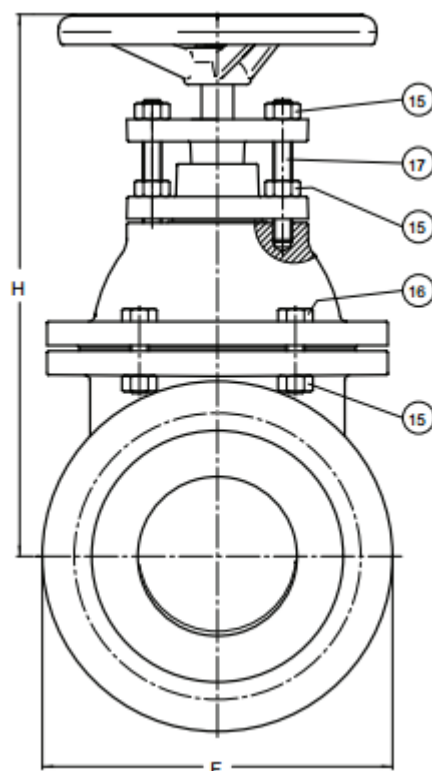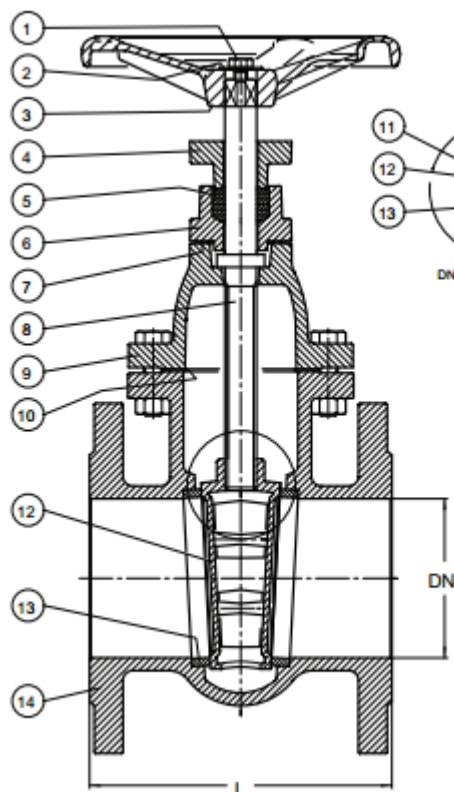

Dimensions

DN	Size	F	L	H	Kg
40	1 1/2"	150	140	225	9
50	2"	165	150	245	11
65	2 1/2"	185	170	277	15
80	3"	200	180	300	18
100	4"	220	190	341	23
125	5"	250	200	404	31
150	6"	285	210	453	41
200	8"	340	230	534	63
250	10"	395	250	627	91
300	12"	445	270	705	124

Pressure / Temperature Rating

Pressure	PN10
Temperature	- 10°C to 120°C



Flanged PN16, GG25
Body, Cast Brass Seat,
Brass Stem, inside Screw
and Non Rising Stem.

-  VOLT Cast Iron Gate Valve Flanged PN16
-  VOLT Roheisen- Absperrschieber mit Flansch PN16
-  VOLT Cast Iron Gate Válvula con bridas PN16
-  VOLT Cast Iron Gate Valve bride PN16

Valves[™]

ONLINE

PN16 Cast Iron Gate Valve

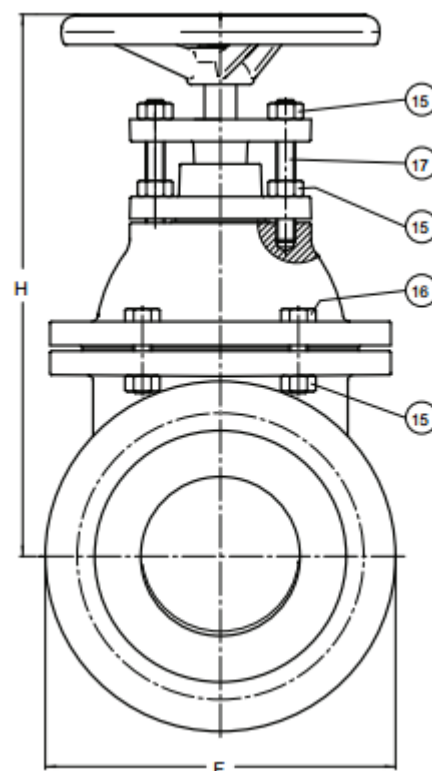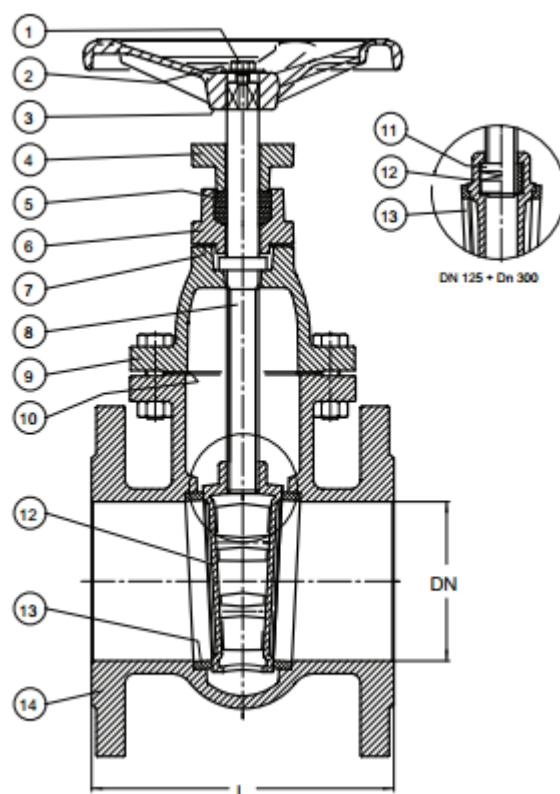

Material List

Item	Part	Description
1	screw	zinc plated carbon steel
2	washer	zinc plated carbon steel
3	handwheel	cast iron
4	packing gland	cast iron
5	packing gland	PTFE
6	stuffing box	cast iron
7	gasket	SBR Rubber
8	stem	Brass
9	bonnet	cast iron
10	gasket	SBR Rubber
11	motherscrew	cast brass
12	wedge	cast brass DN40 to DN100
		cast iron DN125 to DN200
13	seat	cast brass
14	body	cast iron
15	nut	carbon steel
16	screw	carbon steel
17	tie rod	carbon steel

Paint Finish

These valves are supplied externally with a Phenolic-oil resin called SITIPAINT for transport and storage use. We recommend the valve be painted for site installation. The valves can be easily re painted with synthetic enamels top coat and also with Bicomponent industrial epoxy coating. Technical details can be obtained on request.