

SKU: GV4652

-  VOLT Cast Iron Gate Valve Flanged PN6
-  VOLT Roheisen- Absperrschieber mit Flansch PN6
-  VOLT Cast Iron Gate Válvula con bridas PN6
-  VOLT Cast Iron Gate Valve bride PN6

Valves[™]
O N L I N E

- 2" - 8" Cast Iron Gate Valve Brass Seat – PN6
- 2" - 8" Cast Iron Gate Valve Messing Seat - PN6
- 2" - 8" Reparto de la válvula Puerta de Hierro Latón Asiento - PN6
- 2" - 8" Cast Brass Iron Gate Valve Seat - PN6

Cast Iron Gate Valve PN6 Brass Seat



Description

A Flanged PN6, Cast Iron Gate Valve, with Inside Screw Non Rising Stem
GG25 Body, Cast Brass Seats, Brass Stem,
Rated PN10,
Temperature -10°C to 80°C.



Description

Flanged PN6, GG25 Body, Cast Brass Seat, Brass Stem, inside Screw and Non Rising Stem.
Pressure rating of PN10
Temperature up to 80° C



Beschreibung

Mit Flansch PN6 , GG25 Körper, Messingguss Seat, Messing Stängel, Innenschraube und nicht steigender Spindel. Druckstufe PN10
Temperatur bis zu 80 ° C



Descripción

Con bridas PN6 , GG25 Cuerpo, asiento de latón fundido , Tallo de latón , en el interior del tornillo y no Rising Tallo . Resistencia a la presión de PN10 Temperatura hasta 80 ° C



Description

Brides PN6 , GG25 corps , Cast Siège en laiton , Laiton Tige, à l'intérieur de vis et non tige montante . Pression nominale PN10
Température jusqu'à 80 ° C

Paint Finish


These valves are supplied externally with a Phenolic-oil resin called SITIPAINT for transport and storage use. We recommend the valve be painted for site installation. The valves can be easily re painted with synthetic enamels top coat and also with Bicomponent industrial epoxy coating. Technical details can be obtained on request.

-  VOLT Cast Iron Gate Valve Flanged PN6
-  VOLT Roheisen- Absperrschieber mit Flansch PN6
-  VOLT Cast Iron Gate Válvula con bridas PN6
-  VOLT Cast Iron Gate Valve bride PN6

Valves™

ONLINE

PN6 Cast Iron Gate Valve

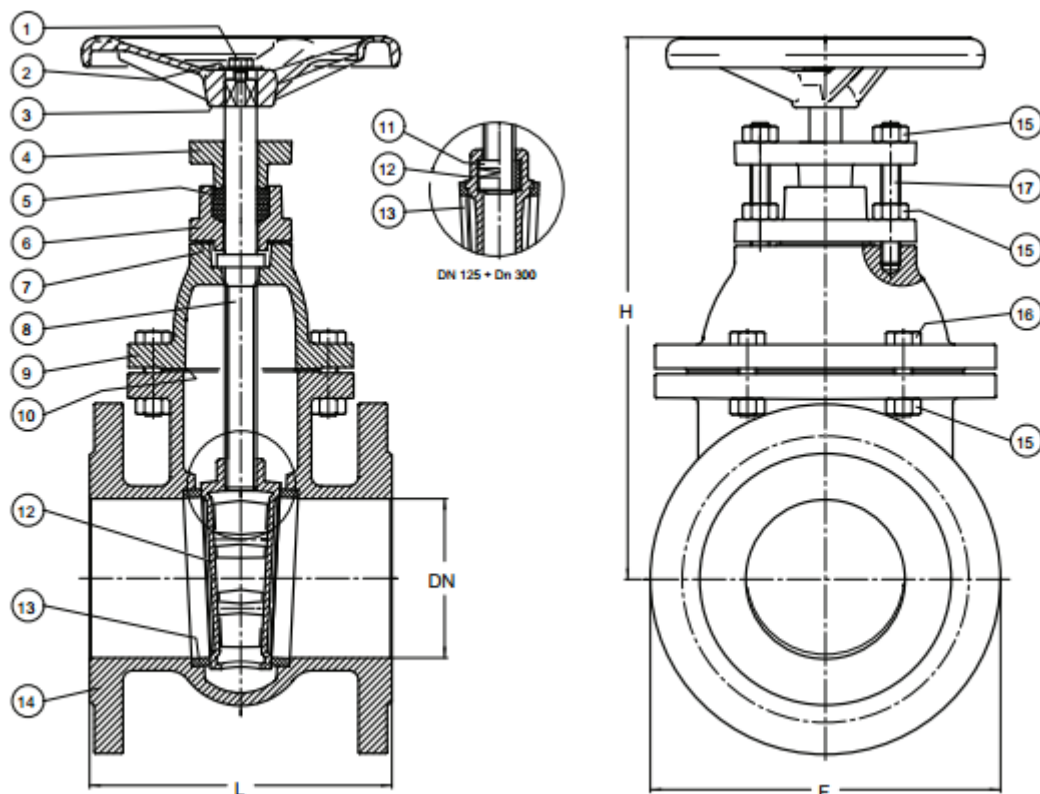

Dimensions

DN	Size	F	L	H	Kg
50	2"	165	150	245	11
65	2 1/2"	185	170	277	15
80	3"	200	180	300	18
100	4"	220	190	341	23
125	5"	250	200	404	31
150	6"	285	210	453	41
200	8"	340	230	534	63

Pressure / Temperature Rating



Pressure	PN10
Temperature	- 10°C to 80°C

Flanged PN6, GG25 Body,
Cast Brass Seat, Brass Stem,
inside Screw and Non Rising
Stem.

-  VOLT Cast Iron Gate Valve Flanged PN6
-  VOLT Roheisen- Absperrschieber mit Flansch PN6
-  VOLT Cast Iron Gate Vlvula con bridas PN6
-  VOLT Cast Iron Gate Valve bride PN6

Valves™ ONLINE

PN6 Cast Iron Gate Valve

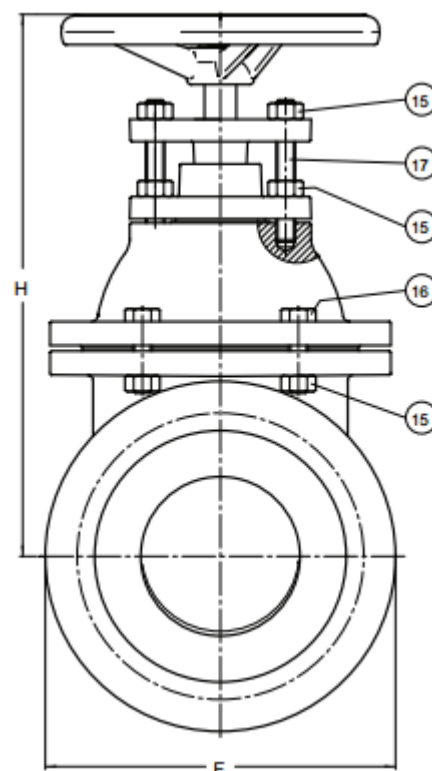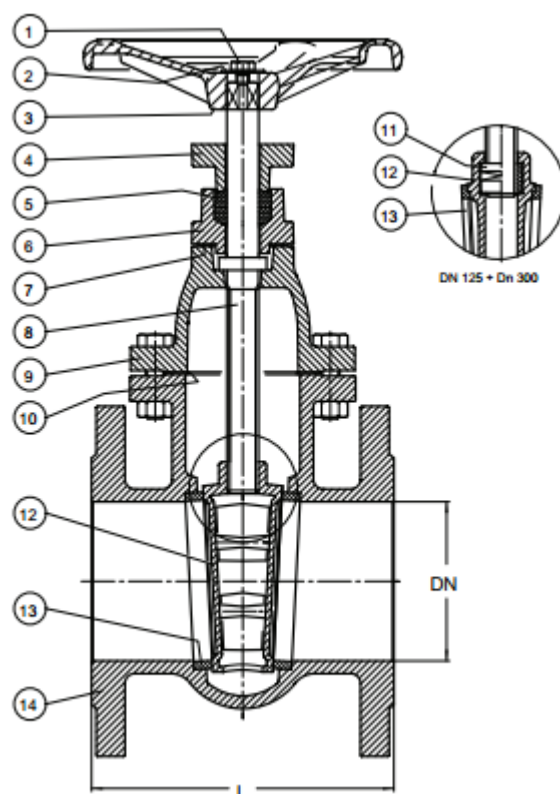

Material List

Item	Part	Description
1	screw	zinc plated carbon steel
2	washer	zinc plated carbon steel
3	handwheel	cast iron
4	packing gland	cast iron
5	packing gland	PTFE
6	stuffing box	cast iron
7	gasket	SBR Rubber
8	stem	Brass
9	bonnet	cast iron
10	gasket	SBR Rubber
11	motherscrew	cast brass
12	wedge	cast brass DN40 to DN100 cast iron DN125 to DN200
13	seat	cast brass
14	body	cast iron
15	nut	carbon steel
16	screw	carbon steel
17	tie rod	carbon steel

Flanged PN6, GG25 Body,
Cast Brass Seat, Brass Stem,
inside Screw and Non Rising
Stem.