

1

Push button - Spring

3/2

Ordering code

T224.1.8.1



TYPE

32 = 3 ways


52 = 5 ways

5/2

Push button - Spring



Weight gr. 170
Operating force 50N



Weight gr. 200
Operating force 50N

Operational characteristics

Fluid

Filtered and lubricated air

Max working pressure

10 bar

Operating temperature

Min. -5°C Max. +50°C

Flow rate at 6 bar with $\Delta p=1$

1050 NI/min

Ø orifice size

mm 8,5

Working port size

G 1/4"

Push button 2 positions

3/2

Ordering code

T224.1.8



TYPE

32 = 3 ways


52 = 5 ways

5/2

Push button 2 positions



Weight gr. 170
Operating force 13N



Weight gr. 200
Operating force 13N

Operational characteristics

Fluid

Filtered and lubricated air

Max working pressure

10 bar

Operating temperature

Min. -5°C Max. +50°C

Flow rate at 6 bar with $\Delta p=1$

1050 NI/min

Ø orifice size

mm 8,5

Working port size

G 1/4"

Lever lateral - Spring

3/2

Ordering code

T224.1.9.1/C

TYPE

32 = 3 ways

52 = 5 ways

LEVER COLOR



1 = Red

2 = Black


3 = Green

5/2

Lever lateral - Spring



Weight gr. 220



Weight gr. 250

Operational characteristics

Fluid

Filtered and lubricated air

Max working pressure

10 bar

Operating temperature

Min. -5°C Max. +50°C

Flow rate at 6 bar with $\Delta p=1$

1050 NI/min

Ø orifice size




mm 8,5



Working port size


G 1/4"



1

Lever lateral 2 positions		3/2	Ordering code	5/2	Lever lateral 2 positions	
			T224.1.9/C TYPE 1 32 = 3 ways 52 = 5 ways LEVER COLOR 1 = Red 2 = Black 3 = Green			
Weight gr. 220					Weight gr. 250	
Operational characteristics	Fluid	Max working pressure	Operating temperature		Flow rate at 6 bar with $\Delta p=1$	Working port size
	Filtered and lubricated air	10 bar	Min. -5°C Max. +50°C		1050 NI/min	G 1/4"

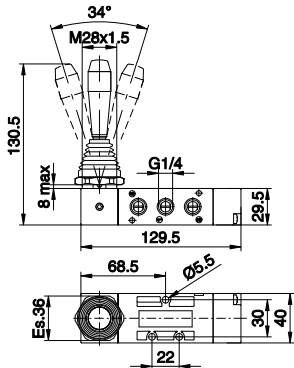Lever lateral spring centre - 3 positions						5/3	
Ordering code							
T224.53.F.9.1/C							
FUNCTION							
31 = Closed centres							
32 = Open centres							
33 = Pressured centres							
LEVER COLOR							
1 = Red							
2 = Black							
3 = Green							
Weight gr. 270							
Operational characteristics	Fluid	Max working pressure	Operating temperature		Flow rate at 6 bar with $\Delta p=1$	$\varnothing$ orifice size	Working port size
	Filtered and lubricated air	10 bar	Min. -5°C Max. +50°C		900 NI/min	mm 8,5	G 1/4"

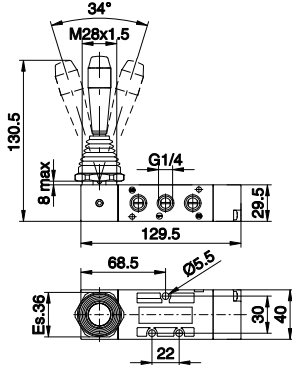Lever lateral - 3 positions detent							5/3
Ordering code							
T224.53.F.9/C							
FUNCTION							
F 31 = Closed centres 32 = Open centres 33 = Pressured centres							
LEVER COLOR							
C 1 = Red 2 = Black 3 = Green							
Weight gr. 270							
Operational characteristics	Fluid	Max working pressure	Operating temperature		Flow rate at 6 bar with $\Delta p=1$	Ø orifice size	Working port size
	Filtered and lubricated air	10 bar	Min. -5°C	Max. +50°C	900 NI/min	mm 8,5	G 1/4"