


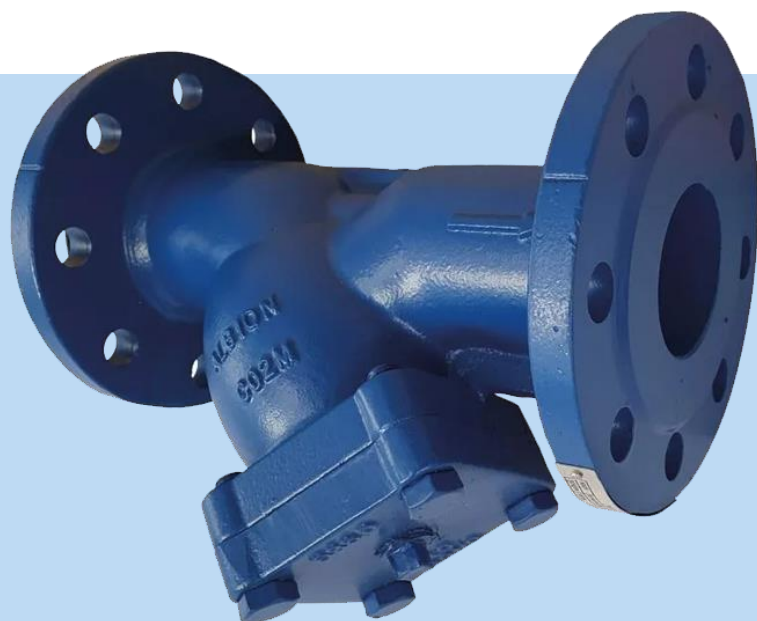

PN25 Ductile Iron 'Y' Type Strainer

- Flange Mounting PN25 (Only)
- BS EN1092 PN25 Connection
- Stainless Steel Basket
- Y Type Pattern
- 1.5mm hole mesh DN50-DN300
- Sizes 50 – 300mm (2"-12")
- Larger Sizes Available

Description

The YS5420 is a ductile iron Y type strainer well suited to meet the demands in today's HVAC industry. Drilled to suit PN25 flanges. The strainer is fitted with a stainless steel removable basket with 1.5mm holes/filtration and removable drain plug. Rated PN25 and a temperature range of -10°C up to 230°C. This valve offers trouble free service, protecting valves and plant equipment from harmful particulates and debris.



Description

Flanged to PN25 and rated PN25 this cost effective Y type strainer offers protection of valves and plant equipment. Fitted with a stainless steel mesh basket that is removable and can be cleaned very simply. Manufactured in ductile iron and ideal for the HVAC market.



Beschreibung

Mit Flansch PN25 und Nenngröße PN25 bietet dieser kostengünstige Y-Typ Schmutzfänger Schutz für Ventile und Anlagenausrüstung. Ausgestattet mit einem herausnehmbaren Edelstahlgitterkorb, der sich sehr einfach reinigen lässt. Hergestellt aus Sphäroguss und ideal für den HLK-Markt.




Descripción

Bridado a PN25 y clasificado PN25, este filtro tipo Y rentable ofrece protección de válvulas y equipos de la planta. Equipado con un cesto de rejilla de acero inoxidable que es extraíble y se puede limpiar de forma muy sencilla. Fabricado en fundición dúctil e ideal para el mercado HVAC.



Description

À brides PN25 et classées PN25, cette crépine de type Y économique offre une protection des vannes et des équipements de l'usine. Équipé d'un panier grillagé en acier inoxydable qui est amovible et peut être nettoyé très simplement. Fabriqué en fonte ductile et idéal pour le marché HVAC.

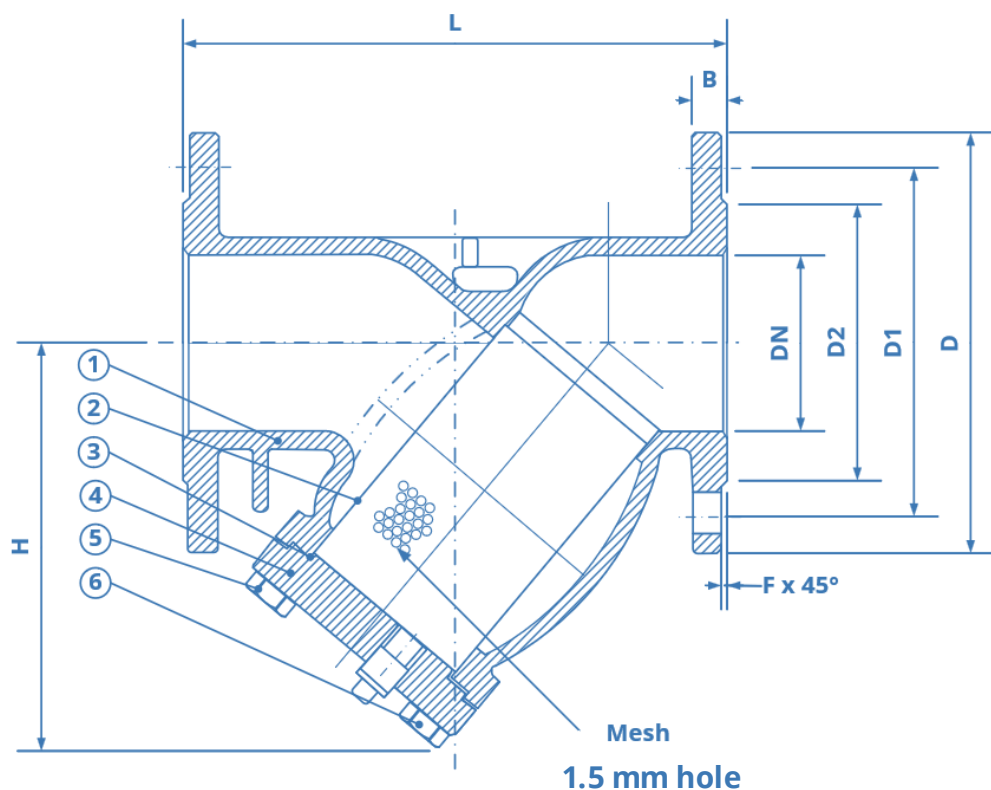

Technical Data

Max. Pressure	25 Bar
Working Temperature	-10°C to + 230°C

DIMENSIONS

	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
L	230	290	310	350	400	480	600	730	850	980	1100	1200	1250	1450
D	165	165	200	235	270	300	360	425	485	555	620	670	730	845
D1	125	145	160	190	220	250	310	370	430	490	550	600	660	770
D2	99	118	132	156	184	211	274	330	389	448	503	548	609	720
B	19	19	19	19	19	20	22	24.5	27.5	30	32	34.5	36.5	42
F	3	3	3	3	3	3	3	3	4	4	4	4	4	4
H	143	165	195	226	272	317	372	457	550	648	760	795	862	985
Kgs	9.3	12.4	15.3	26	32	46	70	122	172	335	479	523	658	160

Material

1	Body	Ductile Iron BS1563 EN-GJS-450
2	Screen	Stainless steel BS970 304S15
3	Bonnet	Ductile Iron BS1563 EN-GJS-450
4	Gasket	Non Asbestos / EPDM
5	Bolt	Steel BS970 43A
6	Screw Plug	Stainless steel BS970 304S15

Pressure/Temperature

